

IOBAC MAGTABS™ MT4+ ADHESIVE-FREE FLOORING INSTALLATION SYSTEM


TECHNICAL DATASHEET

PRODUCT DESCRIPTION

Magnetic on one side and with acrylic-based adhesive on the other, IOBAC MagTabs cleanly and securely affix carpet tiles, +4mm Luxury Vinyl Tiles (LVT), and woven vinyl tiles onto receptive bases, including

- metal raised access floors
- IOBAC Ezy-Install® Magnetically Receptive Underlay and
- IOBAC Magnetically Receptive Resins

Can also be used with sub-floors suitable for floating floor installations.

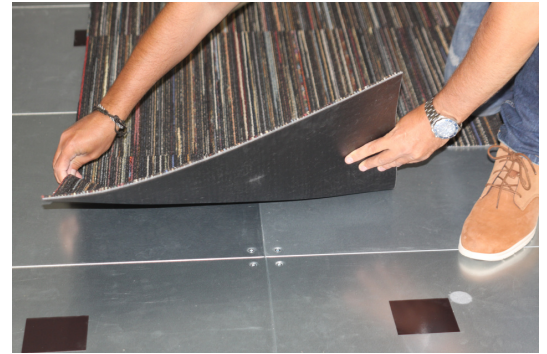

2 Dimensional Hold:

Not only are tiles held together horizontally as per conventional floating floor solutions, but due to magnetic attraction, the IOBAC MagTabs also enable a strong grip in the vertical direction, ensuring tiles are secured well in place until the time comes to uplift them.

Dual Grip technology:

Our next generation MT4+ MagTabs are thinner, lighter, yet stronger than ever before, thanks to IOBAC Dual Grip technology which combines dry-tack with magnetism for phenomenal grab.

Clean Removal:

Floor tiles can be removed cleanly and easily for reuse or recycling, with the base left contamination-free and ready for the next flooring installation straight away.



Storage and Disposal

Resistant to extremes of moisture and temperature.
Constant working temperature of -30 to +60 degrees C.
MT4+ MagTabs can be down-cycled or reused.

IOBAC MAGTABS™ MT4+ ADHESIVE-FREE FLOORING INSTALLATION SYSTEM

TECHNICAL DATASHEET

PRODUCT COMPOSITION

Flexible strontium ferrite magnetic tabs consisting of 3 layers, kiss-cut onto a filmic release liner



FLOOR COVERING:

Carpet tile, +4mm Luxury Vinyl Tile (LVT) or woven vinyl tile



ADHESIVE FILM LAYER

- Acrylic based adhesive with polyester film liner
- Odourless 100% solid material - VOC content not applicable

MAGNETIC FILM

- Flexible strontium ferrite magnetic sheet
- Contains no plasticisers, phthalate free

DUAL-GRIP POLYURETHANE COATING

- VOC-free, odourless plant-based polyurethane resin manufactured mostly from renewable castor oil

RECEPTIVE SUB-FLOOR

Metal raised access floors, IOBAC Ezy-Install® Magnetically Receptive Underlay, IOBAC Magnetically Receptive Resins, plus sub-floors suitable for floating floor installations.

DIMENSIONS AND PACKAGING

MT4+ MagTab Dimensions:

- Each MagTab is 97 x 97 mm
- 0.3mm thickness

Packaging:

- 100 MagTabs per roll
- 8 rolls per case
- = 800 MagTabs per case

Case dimensions:

- 305 x 305 x 305mm
- 12kg weight

INSTALLATION GUIDELINES

Preparation: Ensure sub-floor is clean, dry and free from loose particles which may impair grab.

For full instructions, please refer to IOBAC MagTab Installation Guide and Videos at www.iobac.com/magtabs

Manufactured by IOBAC UK Ltd

Unit 9, Berry Court Farm, Bramley Road, Tadley, RG26 5AT

Email: ian@iobac.com

Telephone: +44 (0)7703 132494